



# Ranger DX600R T4 SURFACE DRILLS

## TECHNICAL SPECIFICATION

Ranger DX600R is a hydraulic, self-propelled, self-contained, crawler based surface drilling rig with full radio control.

Typical applications for Ranger DX600R are road cutting, pipe-line drilling and foundation drilling, as well as production drilling in medium size quarries. Therefore Ranger DX600R is most often used by construction contractors, mines and quarries, and also included in the equipment fleet of rental houses as well.

### KEY FEATURES

Hole diameter:	64- 102 mm (2½" – 4")
Rock tools:	38, 45 or 51 mm (1½", 1¾" and 2")
Rock Drill	17,5kW
Engine output:	168 kW
Flushing air:	6,2 m <sup>3</sup> /min, up to 10 bar
Production capacity:	2200 m <sup>3</sup> /8h
Total weight :	15 600 kg



#### STANDARD COMPONENTS

1 pc Rock drill HL 650 T, hydraulic
1 pc Chain feed CF 145H with movable drill steel support
1 pc Rod handler RH 714 incl. 1 set of jaws
1 pc Boom DB 800 H, articulated
1 pc Carrier track mounted, turnable superstructure
1 pc Power pack diesel driven, hydraulic pumps and on-board compressor with twin pressure control
1 pc Control system Rock Pilot+, full radio remote
1 pc Dust collection system DC 810 H, hydraulic, Primary separator
9 pcs Working lights
1 pc Gauge set for accumulator pressure checking
1 pc Alarm signal
1 Set Manuals, paper copy
1 Set Manuals, CD rom
1 pc Alarm beacon
1 pc Hose reel
1 pc Service light, hand held 12V magnetic
EU-safety devices, EN16228




#### THE JAWS FOR DRILL STEELS

DRILL STEEL TYPE	DRILL STEEL DIAMETER	RECOMMENDED HOLE DIAMETER
Extension rods	38 mm 1 1/2"	64 - 70 mm 2 1/2" - 2 3/4"
MF-rods	38 mm 1 1/2"	64 - 70 mm 2 1/2" - 2 3/4"
Extension rods	45 mm 1 3/4"	76 - 89 mm 3" - 3 1/2"
MF-rods	45 mm 1 3/4"	76 - 89 mm 3" - 3 1/2"
MF-rods	51 mm 2"	89 - 102 mm 3 1/2" - 4"
Extension rods	51 mm 2"	89 - 102 mm 3 1/2" - 4"

#### SELECTION OF OPTIONS


TIM 5200 for vertical holes
TIM 5300 for vertical holes and depth measuring
TIM 6300 inclined holes, depth measuring and GPS aiming
TIM 6500 inclined holes, depth measuring, laser level and GPS aiming
TIM 6700 (TIM6500 with open interface)
Horizontal drilling kit
EN 16228 Safety cage for feed, long
Kit for alternative steels, each
Thread greasing
Thread greasing with 5 gallon bucket
Readyness for Power Extractor
Anti-freeze system for air lines
Biogradeable hydraulic oil
Central lubrication system Sandvik
Electric fuel filling pump
Fast fill connection for fuel Wiggins
Guides for grousers, long
Hydraulic rear ground support
Hydraulic winch
Led lights, 6 pcs
Three bar grouser plates
Towing hook
Turnable superstructure 180 deg.
Xenon lights, 6 pcs
Fuel powered heater for engine
Fuel powered heater for engine and water tank
Readyness for fuel powered heater
Dustmizer (engine heater option needed below freezing point)
Flushing control automatics
Sampling device
Shut down of suction for water holes
Water injection system
Grinder Sandvik RG420H
Spare radio remote transmitter
Extra manuals, price will be added according to pricing sheet
First service kit for Ranger DX600
Special tools for HL 710, HL650, field kit
Special tools for HL 710, HL650, complete
Service agreement - select level from extra item
SanRemo - select level from extra item

COVERAGE AREA AND DIMENSIONS

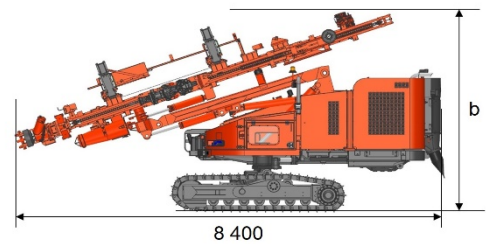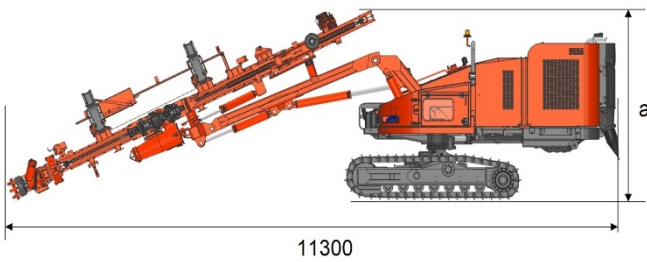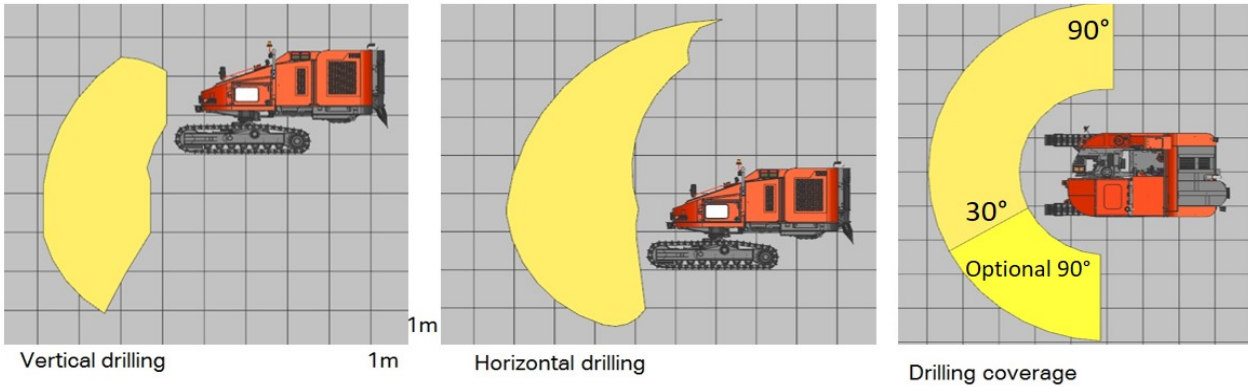

DIMENSIONS

Weight	15 600 kg
Width	2.45 m
Height	a/b, 3.2 m/3.6 m
With safety cage	3.3 m/3.8 m
With noise silencer	3.3 m/4.0 m
Total length	11.3 m/8.4 m



Sandvik Mining and Rock Technology reserves the right to make changes to the information on this data sheet without prior notification to users. Please contact a Sandvik representative for clarification on specifications and options.

ROCKTECHNOLOGY.SANDVIK